

TSW210



TSW210 360° VIEW

INDUSTRIAL ETHERNET SWITCH

TSW210 is an Ethernet switch that offers a great combination of Gigabit Ethernet and SFP. Eight Ethernet ports enable connecting multiple devices to the network quickly and easily without any further configuration. SFP allows including far apart devices while maintaining high-speed rates and reliability.



ETHERNET

8 x Gigabit Ethernet with speeds up to 1000 Mbps

PLUG-N-PLAY

No additional configuration needed

MOUNTING

DIN rail and surface mounting options

SFP

SFP port for long-range Fiber-optic communication



KEY FEATURES


HARDWARE

Power connector	2-pin industrial DC power socket
Input voltage range	7-57 VDC
Power consumption	Idle: 1.03 W, Max: 3.71W
Ethernet	8 x 10/100/1000 Mbps Ethernet ports
SFP	2 x SFP ports for Optical interfaces
IEEE 802.3 series standards	802.3i, 802.3u, 802.3ab, 802.3x, 802.3az
Status LEDs	16 x Ethernet, 1 x Power, 2 x SFP activity
Ingress protection rating	IP30
Operating temperature	-40 °C to 75 °C
Housing	Aluminum housing with wall or DIN rail mounting options and grounding capability
Dimensions	132 x 44.2 x 95.1 mm
Weight	500 g
Installation	Desktop, wall or DIN rail mountable (additional kit needed)

PERFORMANCE SPECIFICATIONS

Bandwidth	20 Gbps
Packet buffer	128 KB
Jumbo frame support	9216 bytes
MAC address table size	2K entries
Auto MDI/MDI-X Cable Detection	Yes

FRONT VIEW

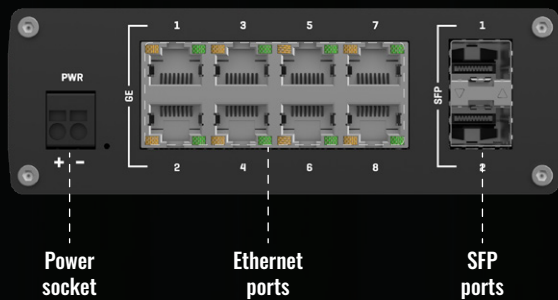

BACK VIEW

